
# FICHA TÉCNICA

## MODELO - 2320/2323

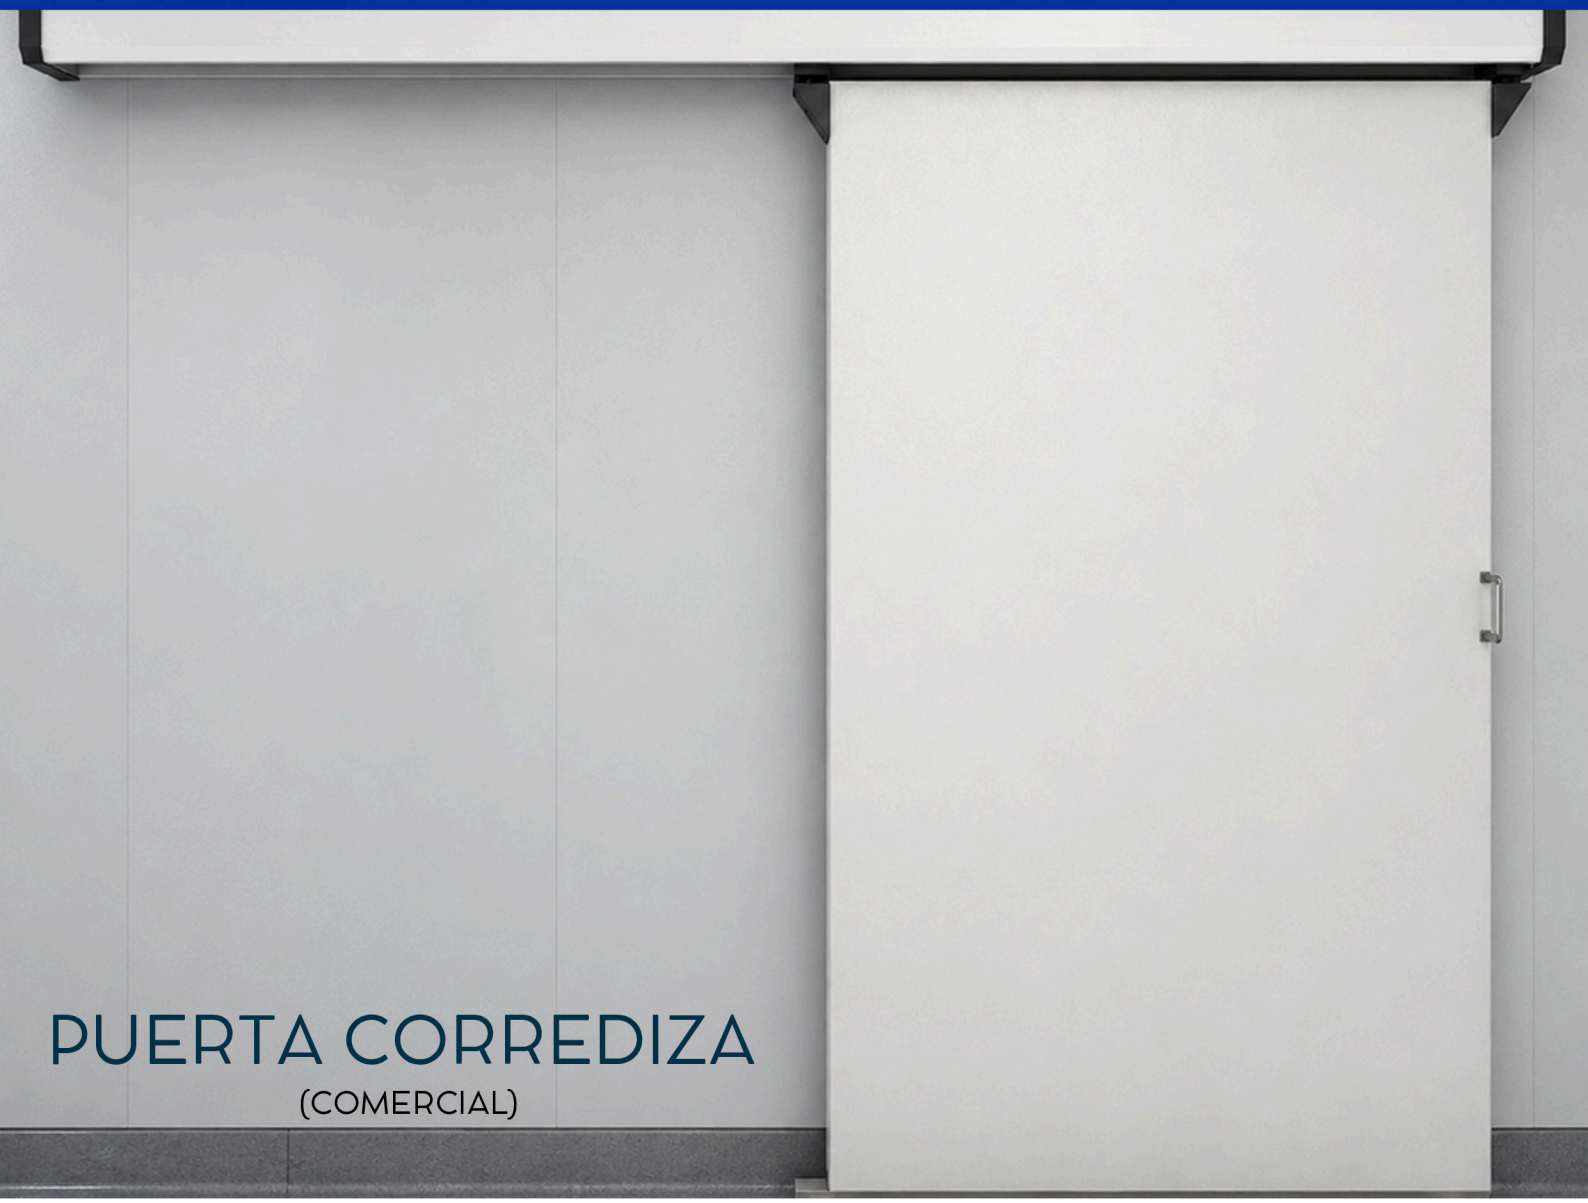

# PUERTA CORREDIZA

(COMERCIAL)

## USOS E INSTALACIONES

Las puertas corredizas para cámaras de refrigeración y congelación tienen aplicaciones principalmente en la industria agroalimenticia, logística en frío e industria farmacéutica, ya que ayudan a conservar la temperatura interna, reducir pérdidas térmicas y facilitar el tránsito de personal o mercancía.

## EJECUCION BAJO PEDIDO

Dependiendo del proyecto, pueden incorporar:

- Resistencia eléctrica anticongelamiento
- Automatización eléctrica
- Sistema de apertura rápida
- Herrajes sanitarios inoxidables
- Protección anti-impacto

## LIMITES DE USO

Cámaras de refrigeración
Normalmente trabajan entre:

- 0 °C y 8 °C

## USES AND FACILITIES

Sliding doors for refrigeration and freezing chambers have applications mainly in the agri-food industry, cold logistics and the pharmaceutical industry, as they help to preserve the internal temperature, reduce heat loss and facilitate the transit of personnel or goods.

## EXECUTION ON REQUEST

Depending on the project, they may include:

- Anti-freeze electric heating element
- Electrical automation
- Quick opening system
- Stainless steel sanitary fittings
- Impact protection

## LIMITS OF USE

Refrigeration chambers
They typically operate between:

- 0 °C and 8 °C

# FICHA TÉCNICA
## MODELO - 2320/2323

# DESCRIPCION GENERAL DEL MODELO

(GENERAL DECRIPTION OF THE MODEL)

### SISTEMA CORREDERA MANUAL 2320 CON RAMPAS. CIERRE SIN MANETAS PESO DE PUERTA: 80 KG.

El sistema Fermatic 2320 está destinado a puertas medianas y pequeñas (80 kg. máximo) ya sea en temperaturas positivas o negativas.

Características:
El despegue y deslizamiento de la puerta, se consigue con un solo movimiento, tanto para abrir como para cerrar.
Los topes de fin de carrera van incorporados en los extremos del riel, para evitar la fijación de los mismos en los paneles o paredes.

Ventajas:
- Estética e higiene gracias al rail en forma de mampara
- Fácil montaje con un mínimo de mantenimiento
- Funcionamiento suave y silencioso
- Excelente protección a la corrosión, debido al espesor de la capa de anodizado (15 micras)
- Sin obstrucciones al usuario gracias al diseño y ubicación de los distintos componentes

### MANUAL SLIDING SYSTEM 2320 WITH RAMPS WITHOUT HANDLES DOOR WEIGHT: 80 KG.

This Fermatic system 2320 has been specifically developed for small and medium size sliding door ( 80 kg. max.)suitable for negative and positive temperatures.

Features:
The lifting of the door leaf from its frame immediately preceed the sliding motion, with similar action when closing.
The stop-butts are incorporated at the end of the rail to avoid any fixing on panel.

Advantages:
- Pleasing appearance and cleanliness are achieved by the rail concealing the mechanical components
- Stop-butts built in the rail
- Very compact size
- Easy mounting and minimum maintenance
- Smooth and noiseless operation
- Excellent protection against corrosion due to 15 microns anodized aluminium rail


| Modelo (Model) | Ancho max. vano (mm)/Max. opening width | Altura max. vano (mm)/ Max opening heigth | Sistema a piso (Floor guide) | Sistema a pared (Wall guide) | Automatizacion (Automatization) |
|---|---|---|---|---|---|
| 2323 | 1201-1400 | 2350 | ✓ | | |
| 2323/7540 | 1201-1400 | 2350 | | ✓ | |
| 2323+K5010 | 1201-1400 | 2350 | ✓ | | ✓ |
| 2323/7540+K5010 | 1201-1400 | 2350 | | ✓ | ✓ |


# MODELO - 2320/2323

La KAF-DOOR modelo 2323 está diseñada y fabricada con:
- Núcleo aislante.
- Bastidor de madera.
- Revestimiento en las dos caras con resistencia a los impactos, productos de lavado y variaciones térmica con acabado de lámina pintro, aluminio y acero inoxidable.
- Sellado por medio de empaques europeos de EPDM especializados, flexibles de alta durabilidad y calidad.
- Sistemas para puertas deslizantes con un peso máximo de 80 kg.
- Traslación de la puerta suave y silenciosa debido a las poleas laterales y a la pista de rodadura para trabajos de alto flujo como el sector Industrias agroalimentarias, Cocinas, Salas blancas, etc.

The KAF-DOOR model 2323 is designed and manufactured with:
- Insulating core.
- Wooden frame.
- Double-sided cladding resistant to impacts, cleaning products, and thermal variations, with a finish of painted sheet metal, aluminum, and stainless steel.
- Sealed using specialized, flexible, high-durability, and high-quality European EPDM gaskets.
- Sliding door systems with a maximum weight capacity of 80 kg.
- Smooth and quiet door operation thanks to side pulleys and a running track, ideal for high-traffic areas such as the food processing industry, kitchens, cleanrooms, etc.


## PUERTA - 2323 (GUIA DE PISO/FLOOR GUIDE)

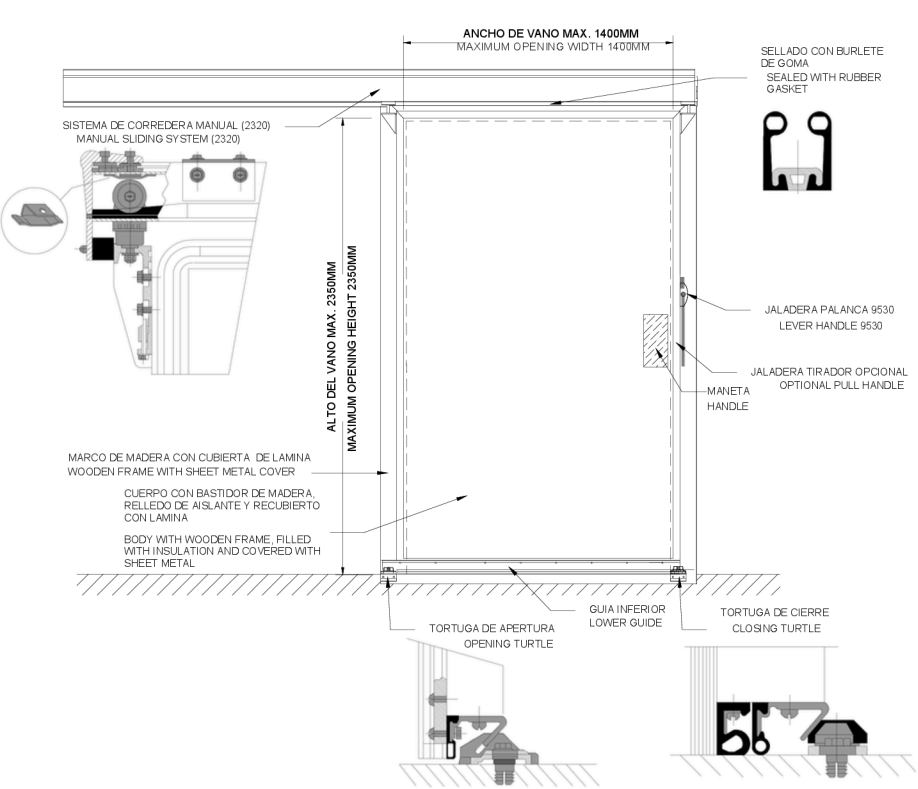

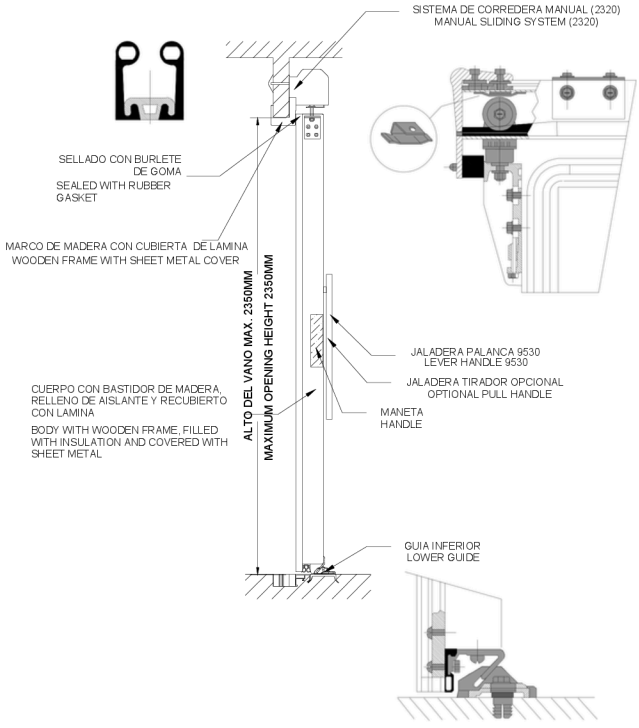



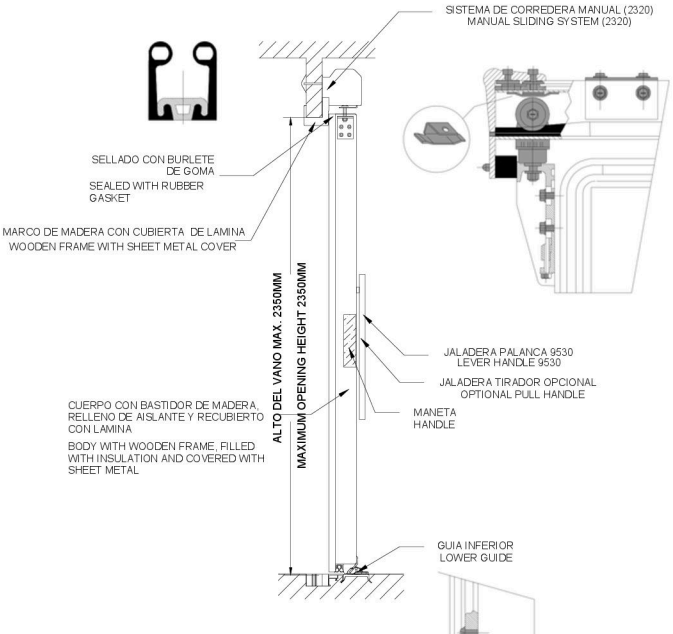
# MODELO - 2320/2323


## PUERTA - 2323/7540 (GUIA DE PARED/WALL GUIDE)

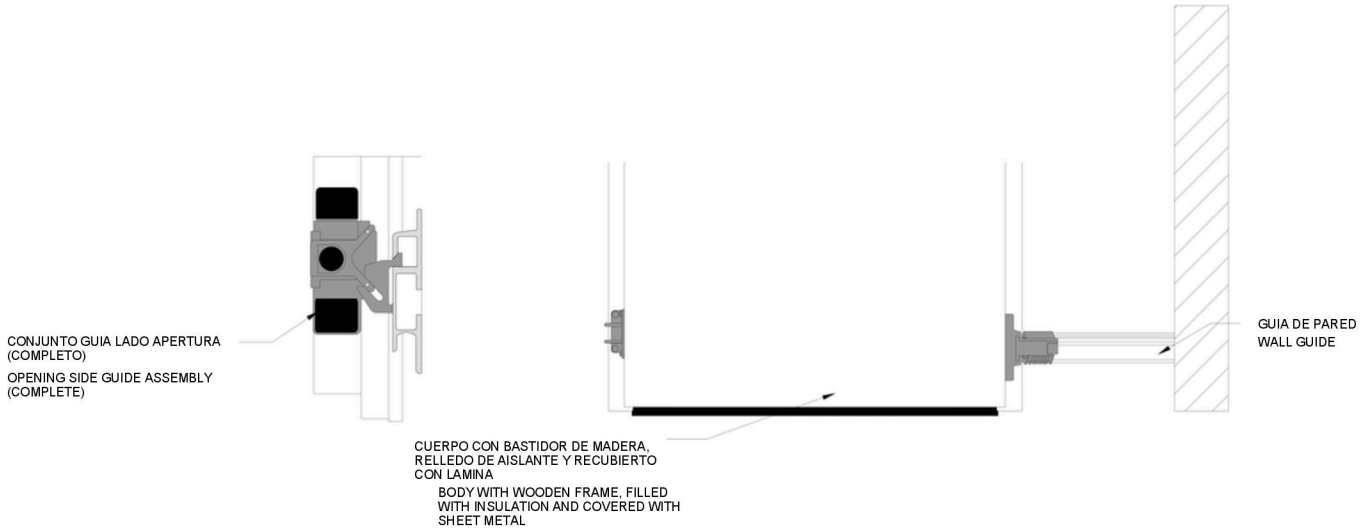



## PUERTA - 2323+K5010 (AUTOMATIZADA/AUTOMATIZED)

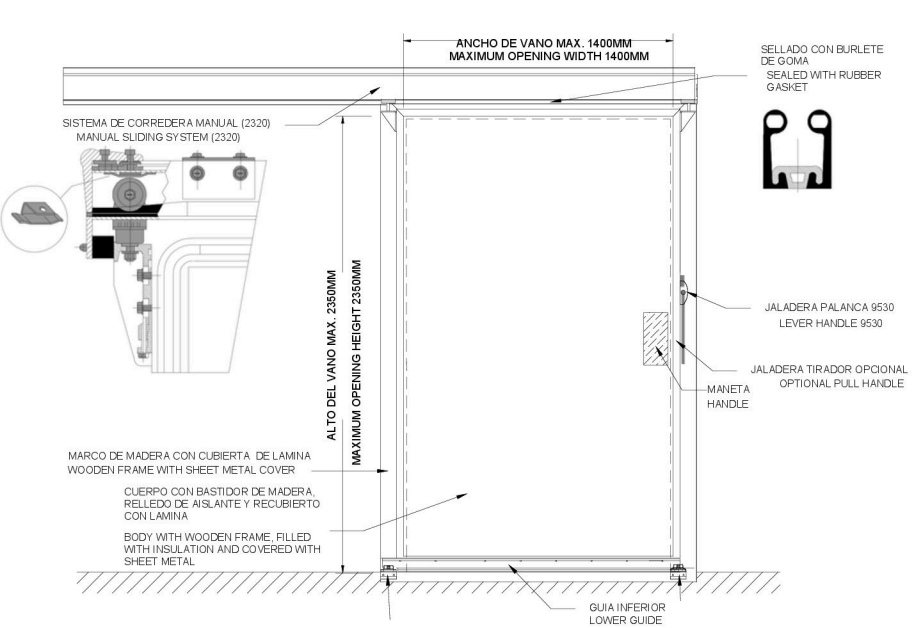




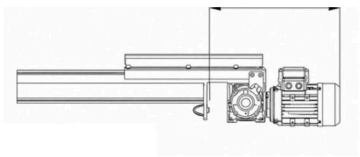


# PUERTA - 2321/7540+K5010

## (GUIA DE PARED AUTOMATIZADA/ AUTOMATIZED WALL GUIDE)

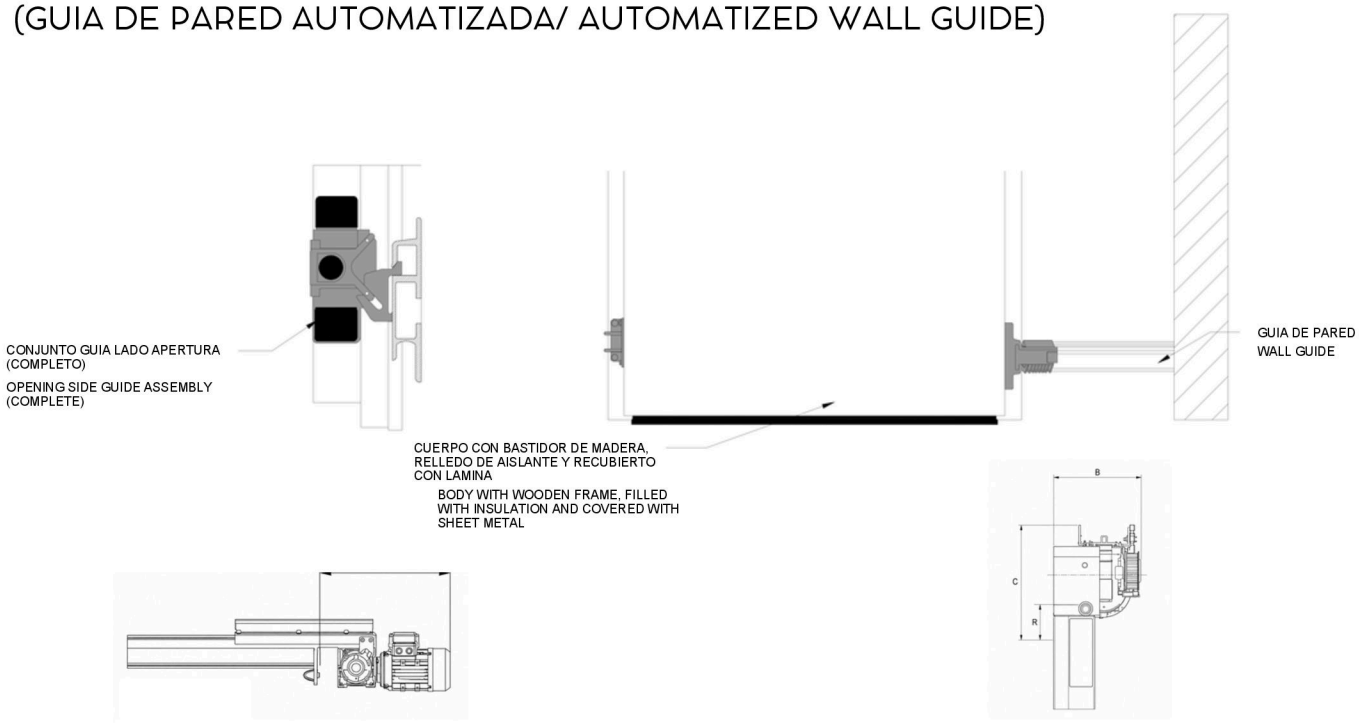


# MARCO- 2320

