KAF DOORS
PUERTAS PARA CÁMARAS DE REFRIGERACIÓN Y CONGELACIÓN

FICHA TÉCNICA

MODELOS - VAD - 03-04/1000



APLICACIÓN

Puerta batiente que se usa en ambientes climatizados con temperatura positiva para instalación en cualquier tipo de industria alimentaria, supermercados, hipermercados, hostelería, restauración.
Uso en zonas de paso con tráfico intenso.

VENTAJAS

- Alta durabilidad: están diseñadas para resistir el uso rudo diario sin deformarse ni requerir mantenimiento constante.
- Ahorro de tiempo y recursos: se abren automáticamente con el contacto.
- Optimización de flujo operativo: facilitan el paso continuo de personal y vehículos.

BENEFICIOS

- Mirilla de acrílico
- Bumper o placa de pateo
- Tornillería de acero inoxidable
- Bisagra con sistema vaivén

APLICATION

Hinged door for use in positive-temperature climate-controlled environments; suitable for installation in all types of food industry facilities, supermarkets, hypermarkets, and the hospitality and foodservice sectors.
Designed for high-traffic areas.

ADVANTAGES

- High durability: designed to withstand daily heavy use without deforming or requiring constant maintenance.
- Time and resource savings: they open automatically upon contact.
- Operational flow optimization: they facilitate the continuous movement of personnel and vehicles.

BENEFITS

- Acrylic vision panel
- Bumper or kick plate
- Stainless steel hardware
- Double-action hinge

KAF DOORS
PUERTAS PARA CÁMARAS DE REFRIGERACIÓN Y CONGELACIÓN

MODELOS - VAD - 01-02/450

DESCRIPCION GENERAL DEL MODELO

(GENERAL DECRIPTION OF THE MODEL)

PUERTA BATIENTE (VAIVEN) CON BISAGRAS DE DOBLE ACCION.

- Fabricada con materiales con gran resistencia química y mecánica.
- Estas puertas cuentan con un sistema de apertura bidireccional, que permite el paso fluido sin necesidad de usar las manos, también están reforzadas para resistir impactos frecuentes sin deformarse.
- Una hoja ideal para pasos concurridos y trafico pesado en espacios reducidos.
- Alianza estricta con todos los herrajes y componentes de KAIMAN DOOR, por su alta calidad y rendimiento.
- Mayor seguridad gracias a su diseño con mirilla de acrilico transparentes que mejora la visibilidad y disminuye riesgos de accidente.

SWING DOOR WITH DOUBLE-ACTION HINGES.


- Manufactured using materials with high chemical and mechanical resistance.
- These doors feature a two-way opening system that allows for smooth, hands-free passage; they are also reinforced to withstand frequent impacts without deforming.
- An ideal door panel for high-traffic areas and heavy use in confined spaces.
- Fully compatible with KAIMAN DOOR hardware and components, ensuring high quality and performance.
- Enhanced safety thanks to a design featuring transparent acrylic vision panels, which improve visibility and reduce the risk of accidents.


Modelo (Model)	Ancho max. vano (mm)/Max. opening width	Altura max. vano (mm)/ Max opening heigth	Numero de bisagras (Hinges incuided)	Altura de Bumper (mm)/ (Bumper Height)	Mirilla Incluida (peephole included)
VAD-03/S3	1300-1700	1800-2100	2	0	✓
VAD-04/S4	1700-2500	2100-2500	3	0	✓
VAD-03/1000	1300-1700	1800-2100	2	1000	✓
VAD-04/1000	1700-2500	2100-2500	3	1000	✓

MODELO - VAD - 03/1000

La KAF-DOOR modelo VAD 03/04 está diseñada y fabricada con: - Núcleo aislante. - Bastidor de madera. - Revestimiento en las dos caras con resistencia a los impactos, productos de lavado y variaciones térmica con acabado de lámina pintro, aluminio y acero inoxidable. -Mirilla para tener visibilidad de ambos lados de la puerta. - Sellado por medio de empaques europeos de EPDM especializados, flexibles de alta durabilidad y calidad. - Sistema vaiven de alta calidad y desempeño. - Bumper o placa de pateo, le brindan protección para aplicaciones de trabajo pesado con alto flujo como el sector alimenticio, farmacéutico, automotriz, de almacenamiento, etc.

The KAF-DOOR Model VAD 03/04 is designed and manufactured featuring: - An insulating core. - A wooden frame. - Double-sided cladding resistant to impacts, cleaning agents, and temperature fluctuations, available in pre-painted sheet metal (Pintro), aluminum, or stainless steel finishes. - A viewing window for visibility from both sides of the door. - Sealing via specialized, high-quality, flexible European EPDM gaskets. - A high-performance, high-quality double-action (swing) system. - Bumpers or kick plates that provide protection for heavy-duty, high-traffic applications in sectors such as food processing, pharmaceuticals, automotive, warehousing, etc.

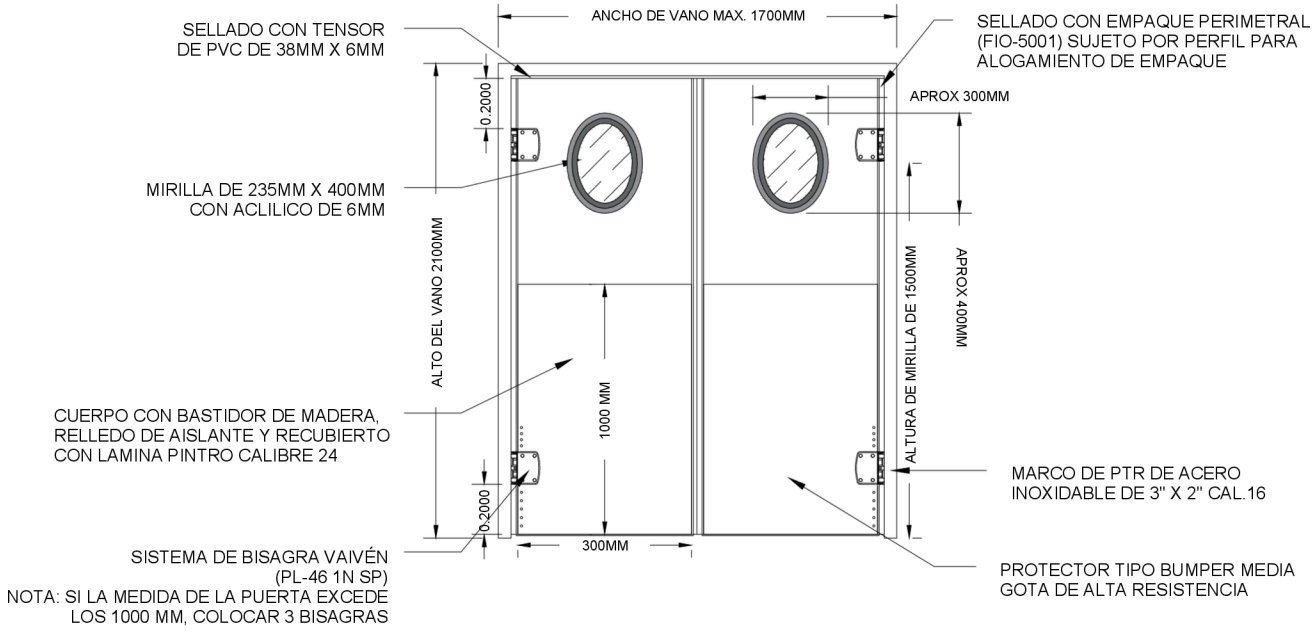

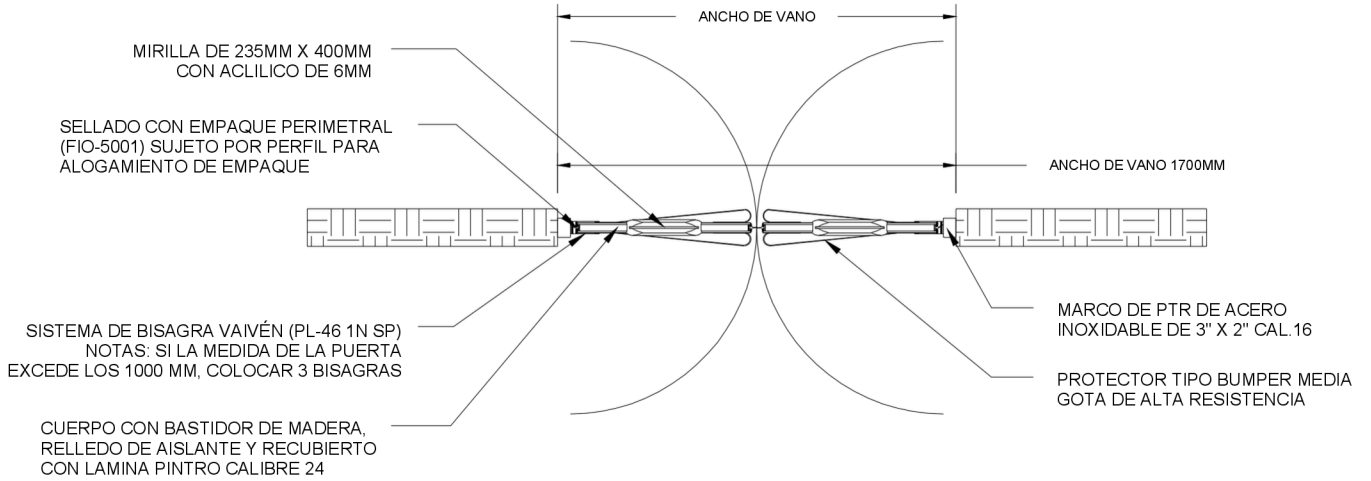



KAF DOORS
PUERTAS PARA CÁMARAS DE REFRIGERACIÓN Y CONGELACIÓN

MODELO - VAD - 04/1000

VAS - 04/1000

(Puerta doble batiente con bisagras de doble accion /Swing double door with double action hinges)

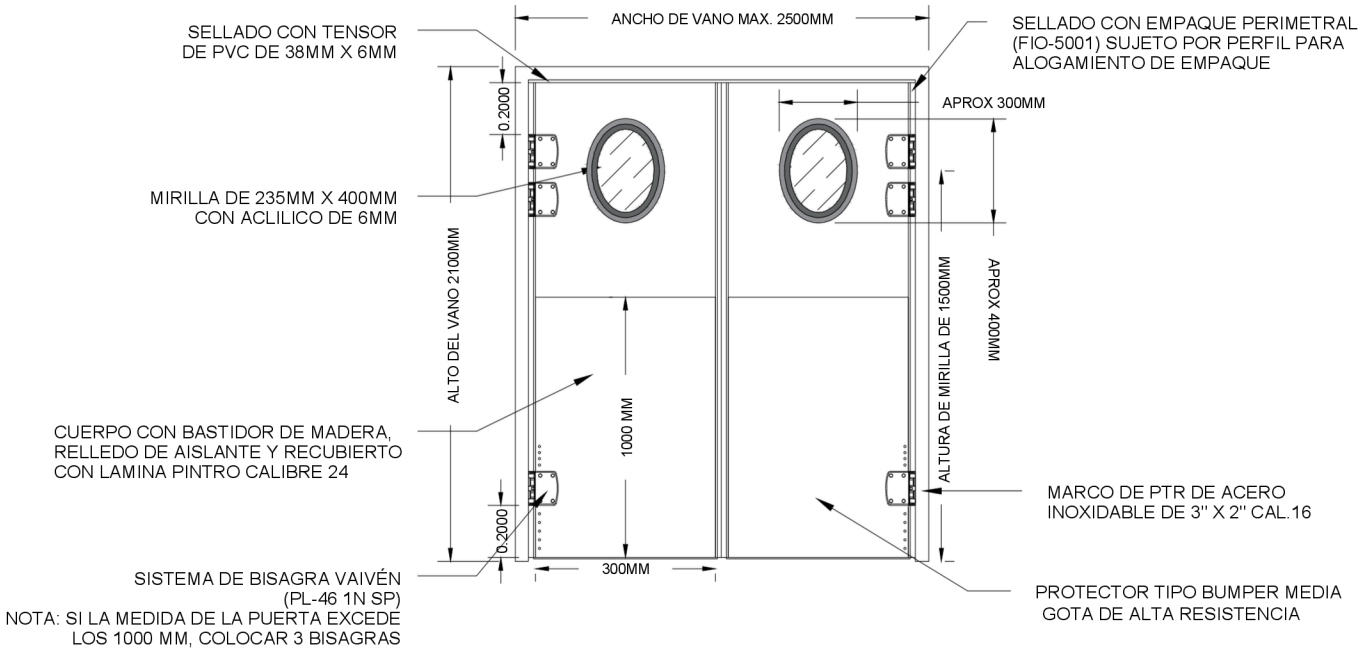


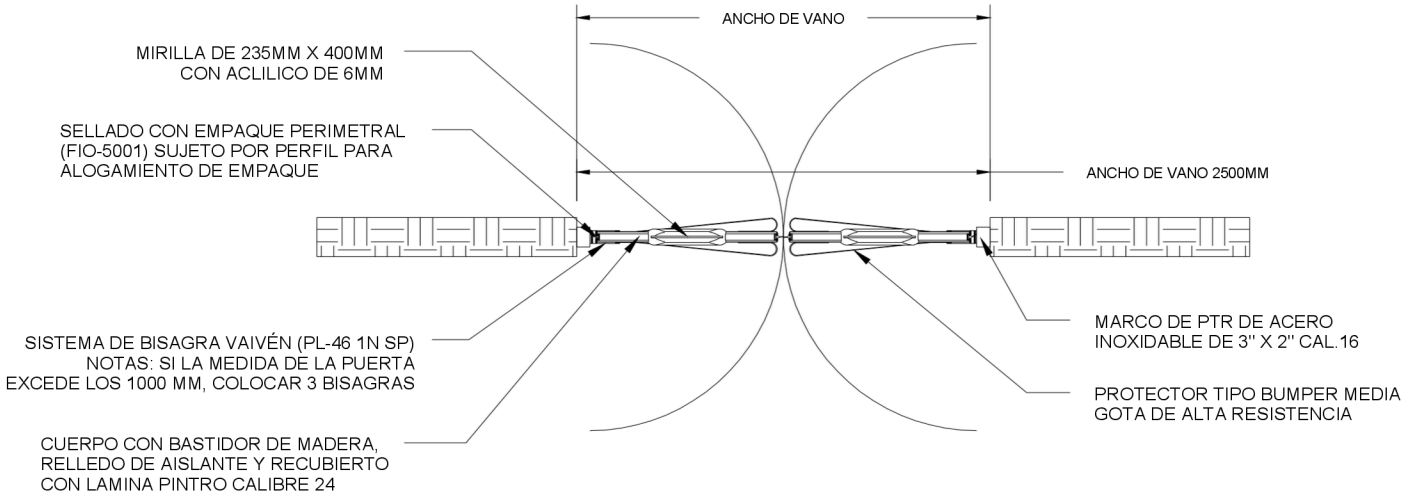



BISAGRA - PL-4651N (GUIA DE PARED/WALL GUIDE)

La bisagra PL-4651N está fabricada en composite gris con mecanismo interno metálico inoxidable y sistema de tensión por muelles, lo que brinda resistencia y funcionamiento estable. Es apta para puertas de hasta 30 kg con 2 bisagras y cuenta con opción de apertura con parada a 90° o sin parada, según el tipo de instalación. Ideal para puertas industriales o de uso continuo que requieren durabilidad y fácil montaje.

The PL-4651N hinge is made of gray composite material with a stainless steel internal mechanism and spring tension system, providing strength and stable operation. It is suitable for doors up to 30 kg with two hinges and offers the option of opening with or without a 90° stop, depending on the installation. Ideal for industrial or high-traffic doors requiring durability and easy assembly.

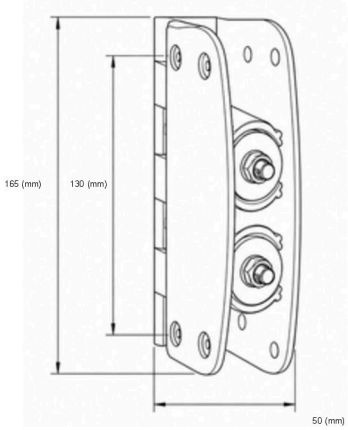



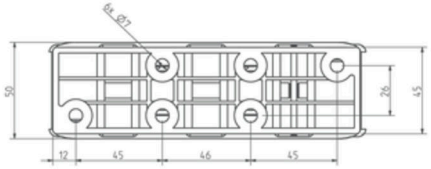

MIRILLA - MB 5767

La mirilla para puerta tipo KAF-DOOR permite tener visibilidad entre ambos lados de la puerta sin necesidad de abrirla, mejorando la seguridad y el flujo de trabajo.
Está fabricada con policarbonato transparente de 6 mm y burlete de goma modelo MB 5767, materiales que brindan resistencia, durabilidad y fácil instalación.
Su diseño es ideal para puertas industriales que requieren visibilidad, seguridad y bajo mantenimiento.

The KAF-DOOR door viewer allows visibility between both sides of the door without opening it, improving safety and workflow.
It is made of 6 mm thick transparent polycarbonate and an MB 5767 rubber weatherstrip, materials that provide strength, durability, and easy installation.
Its design is ideal for industrial doors that require visibility, security, and low maintenance.



